


585 HEAVY-DUTY STEAM HOSE



STEAM HOSE FOR 210°C (410°F) WIRE REINFORCED

- Tube** : Black, smooth epdm rubber specially compounded to withstand superheated steam
- Reinforcement** : plies of steel wire cord
- Cover** : Black, smooth (wrapped finish) epdm rubber with excellent resistant to high temperature, weathering, abrasion and ageing; it is pin-pricked to prevent separation
- Operating Temperature** : -40°C to +210°C

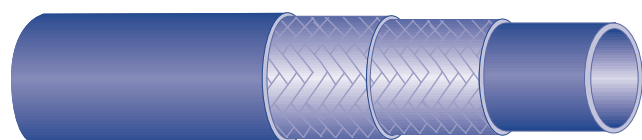

PRODUCT CODE	HOSE BORE		HOSE O.D.		MAX.W.P. (PSI)	THEORETICAL B.P (PSI)
	(IN)	(MM)	(IN)	(MM)		
58508	1/2	13	1	25	250	2,500
58510	5/8	16	1 ³ / ₃₂	28	250	2,500
58512	3/4	19	1 ⁷ / ₃₂	31	250	2,500
58516	1	25	1 ²⁹ / ₆₄	37	250	2,500
58520	1 ¹ / ₄	32	1 ¹³ / ₁₆	46	250	2,500
58524	1 ¹ / ₂	38	2 ¹ / ₈	54	250	2,500
58532	2	51	2 ⁴¹ / ₆₄	67	250	2,500
58540	2 ¹ / ₂	63.5	3 ⁵ / ₁₆	84	250	2,500
58548	3	76	3 ¹³ / ₁₆	97	250	2,500
58564	4	102	4 ⁷ / ₈	124	250	2,500


* Other sizes are available on request.

561 FUEL & OIL DELIVERY HOSE



USED FOR DELIVERY AND TRANSFER OF A WIDE RANGE OF PETROLEUM PRODUCTS UP TO 30% AROMATIC CONTENT AND UP TO A MAXIMUM WORKING TEMPERATURE OF +70° C

- Tube** : Black, smooth, nitrile rubber compound
- Reinforcement** : High strength synthetic cord plus anti-static copper wires
- Cover** : Black, smooth (wrapped finish) high grade chloroprene rubber compounded for an excellent resistant to weather, ozone, abrasion and oil
- Operating Temperature** : -15°C to +70°C

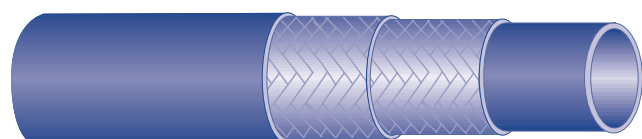

PRODUCT CODE	HOSE BORE		HOSE O.D.		MAX.W.P. (PSI)	THEORETICAL B.P (PSI)
	(IN)	(MM)	(IN)	(MM)		
56108	1/2	13	1 ³ / ₁₆	20	150	450
56110	5/8	16	1 ¹ / ₆₄	26	150	450
56112	3/4	19	1 ¹ / ₁₆	27	150	450
56116	1	25	1 ¹³ / ₃₂	36	150	450
56120	1 ¹ / ₄	32	1 ⁴⁷ / ₆₄	44	150	450
56124	1 ¹ / ₂	38	1 ³¹ / ₃₂	50	150	450
56132	2	51	2 ¹ / ₂	63	150	450
56140	2 ¹ / ₂	63	2 ⁵⁹ / ₆₄	74	150	450
56148	3	76	3 ¹ / ₂	89	150	450
56164	4	102	4 ²¹ / ₃₂	118	150	450
56196	6	152	6 ³⁹ / ₆₄	168	150	450
561128	8	203	8 ¹³ / ₁₆	224	150	450

* Other sizes are available on request.