



## OD10 OIL DELIVERY HOSE



**RECOMMENDED FOR OIL, HYDRAULIC AND PETROLEUM BASED FLUID DELIVERY WITH UP TO 55% AROMATIC CONTENT.**

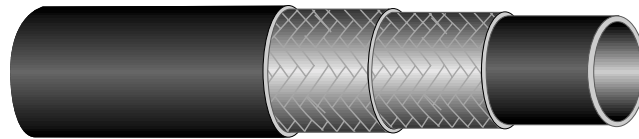

- Tube** : Black, smooth conductive NBR compound.
- Reinforcement** : Synthetic, high tensile strength textile with anti-static copper wires.
- Cover** : Black wrapped finish. Excellent resistant to oil and weather.
- Temperature** : -20°C to + 80°C
- Branding** :  OD10-(size) OIL DELIVERY HOSE ID (size) W.P. 150PSI B.P. 450PSI
- Brand Type** : Bright orange negative branding on black cover.

PRODUCT CODE	I. D.		O. D.		W. P.	B. P. THEORETICAL
	(IN)	(MM)	(IN)	(MM)	(PSI)	(PSI)
<b>OD10-08</b>	1/2	13	0.787	20	150	450
<b>OD10-10</b>	5/8	16	1.024	26	150	450
<b>OD10-12</b>	3/4	19	1.063	27	150	450
<b>OD10-16</b>	1	25	1.417	36	150	450
<b>OD10-20</b>	1 1/4	32	1.732	44	150	450
<b>OD10-22</b>	1 3/8	35	1.811	46	150	450
<b>OD10-24</b>	1 1/2	38	1.969	50	150	450
<b>OD10-26</b>	1 5/8	41.3	2.087	53	150	450
<b>OD10-28</b>	1 3/4	44.5	2.205	56	150	450
<b>OD10-32</b>	2	51	2.480	63	150	450
<b>OD10-36</b>	2 1/4	57.2	2.756	70	150	450
<b>OD10-38</b>	2 3/8	60.3	2.835	72	150	450
<b>OD10-40</b>	2 1/2	63	2.913	74	150	450
<b>OD10-44</b>	2 3/4	69.9	3.268	83	150	450
<b>OD10-48</b>	3	76	3.504	89	150	450
<b>OD10-64</b>	4	102	4.646	118	150	450
<b>OD10-96</b>	6	152	6.614	168	150	450
<b>OD10-128</b>	8	203	8.819	224	150	450

\* Other sizes are available on request.


*Due to continual product improvements, UNI-FLEX™ reserves the right to alter specs without prior notice.*

## OS10 OIL SUCTION AND DELIVERY HOSE



**RECOMMENDED FOR OIL, HYDRAULIC AND PETROLEUM BASED FLUID, SUCTION AND DELIVERY WITH UP TO 55% AROMATIC CONTENT.**



- Tube** : Black, smooth conductive NBR compound.
- Reinforcement** : Synthetic, high tensile strength textile with embedded helix wires.
- Cover** : Black wrapped finish. Excellent resistance to oil and weather.
- Temperature** : -20°C to + 80°C
- Branding** :  OS10-(size) OIL SUCTION/DELIVERY HOSE ID (size) W.P. 150PSI B.P. 450PSI
- Brand Type** : Yellow negative branding on black cover.

PRODUCT CODE	I. D.		O. D.		W. P.	B. P. THEORETICAL
	(IN)	(MM)	(IN)	(MM)	(PSI)	(PSI)
<b>OS10-12</b>	3/4	19	1.142	29	150	450
<b>OS10-16</b>	1	25	1.378	35	150	450
<b>OS10-20</b>	1 <sup>1</sup> / <sub>4</sub>	32	1.693	43	150	450
<b>OS10-22</b>	1 <sup>3</sup> / <sub>8</sub>	35	1.811	46	150	450
<b>OS10-24</b>	1 <sup>1</sup> / <sub>2</sub>	38	1.969	50	150	450
<b>OS10-32</b>	2	50	2.480	63	150	450
<b>OS10-40</b>	2 <sup>1</sup> / <sub>2</sub>	63	3.031	77	150	450
<b>OS10-48</b>	3	76	13.583	91	150	450
<b>OS10-64</b>	4	102	4.685	119	150	450
<b>OS10-80</b>	5	127	5.787	147	150	450
<b>OS10-96</b>	6	152	6.850	174	150	450
<b>OS10-128</b>	8	203	8.976	228	150	450

\* Other sizes are available on request.

Due to continual product improvements, UNI-FLEX™ reserves the right to alter specs without prior notice.